BI-DIRECTIONAL FEEDBACK
4-WAY REMOTE CONTROL SWITCH

Range 5000 metres | Receive with feedback
Adjustable frequency - Tap/self-locking can be set



THESE FEATURES ARE IMPORTANT

More functions



FREQUENCY BAND ADJUSTMENT



REMOTE CONTROL



MULTI-CHANNEL



REMOTE CONTROL

RCS REMOTE CONTROL SWITCH

STRONG SIGNAL THROUGH THE WALL REMOTE CONTROL

SUITABLE FOR DIFFERENT PLACES SUCH AS RURAL, URBAN, ENTERPRISE ETC. HIGH SENSITIVITY CAN PENETRATE THE WALL REMOTE CONTROL



OPEN THE
LITHIUM AGE

ULTRA-LONG DISTANCE REMOTE CONTROL


VIEWING DISTANCE UP TO 5000 METRES



OPEN THE
LITHIUM AGE

MULTIPLE CONTROLS DO NOT AFFECT EACH OTHER

MULTIPLE DEVICES CAN WORK SIMULTANEOUSLY

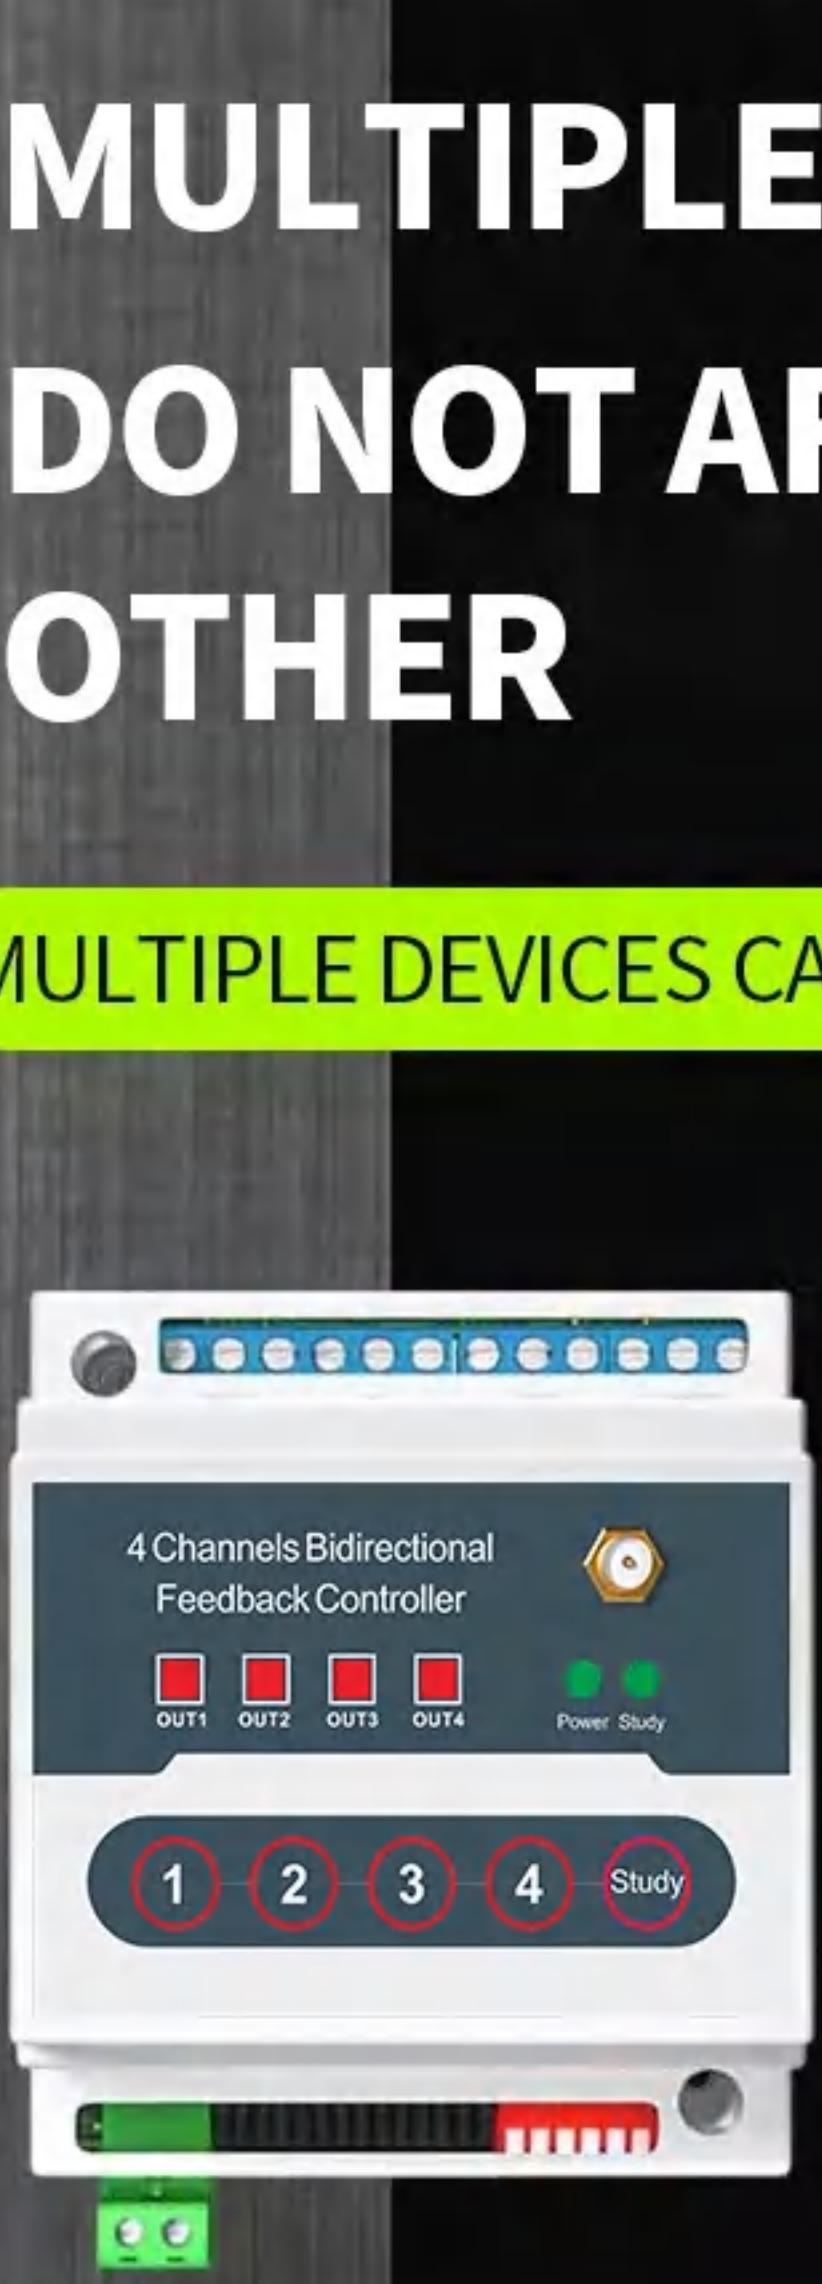

420MHZ



430MHZ



WIDE RANGE OF USE

SUITABLE FOR BLOWERS, FISH POND OXYGENATION, INDUSTRIAL CONTROL EQUIPMENT, GREENHOUSE WATERING AND ALL KINDS OF MOTORS.












OPEN THE
LITHIUM AGE

FREQUENCY ADJUSTMENT METHOD

TAP, SELF-LOCKING, INTERLOCKING MODE

FREQUENCY REGULATION



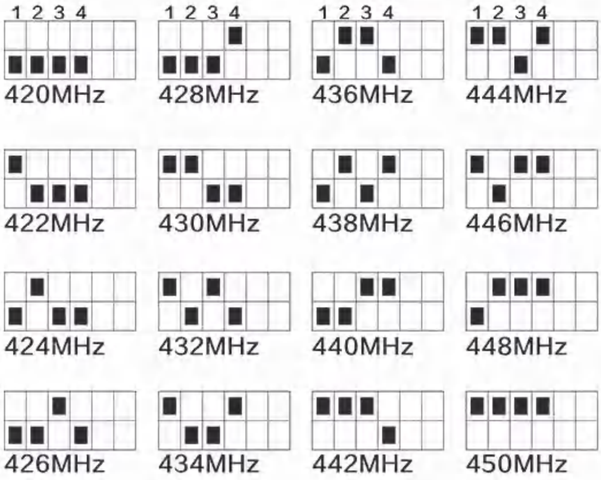


TAP & SELF-LOCKING



SELF-LOCKING



TAP



MAINFRAME

WORKING MODE

TAP VERSION - PRESS AND HOLD THE TRANSMITTER 0 BUTTON (EXTERNAL TRIGGER), THE RECEIVER D ROAD STARTS TO WORK RELEASE THE TRANSMITTER D BUTTON (EXTERNAL TRIGGER), THE RECEIVER D ROAD STOPS WORKING (2, 34 ROAD IS THE SAME REASON).

SELF-LOCKING VERSION - PRESS THE TRANSMITTER O BUTTON (EXTERNAL TRIGGER), THE RECEIVER D ROAD STARTS TO WORK AND THEN PRESS THE TRANSMITTER O BUTTON (EXTERNAL TRIGGER), THE RECEIVER D ROAD STOPS WORKING (2, 3 ROAD IS THE SAME) NOTE: ONLY ONE CHANNEL CAN BE TRANSMITTED EACH TIME.


TWO TYPES OF CONTROL

MULTIPLE CONTROL METHODS

REMOTE CONTROL



EXPERIMENTALLY TESTED
REMOTE CONTROL DISTANCE UP
TO 5000 METRES

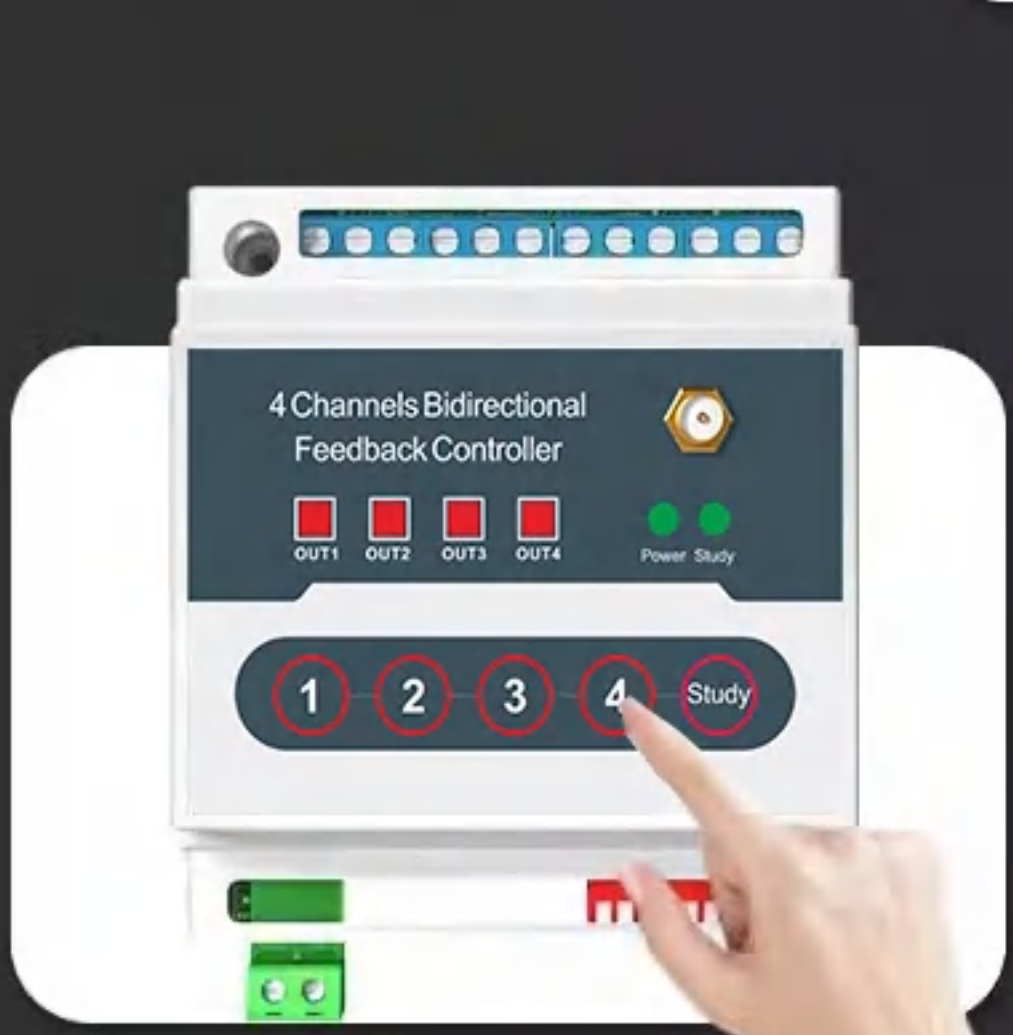


MANUAL CONTROL

PANEL HAS FORWARD/REVERSE
AND OTHER BUTTONS
PREVENT THE REMOTE CONTROL
IS NOT AROUND

PRODUCT PARAMETERS

CHANPIN CANSHU

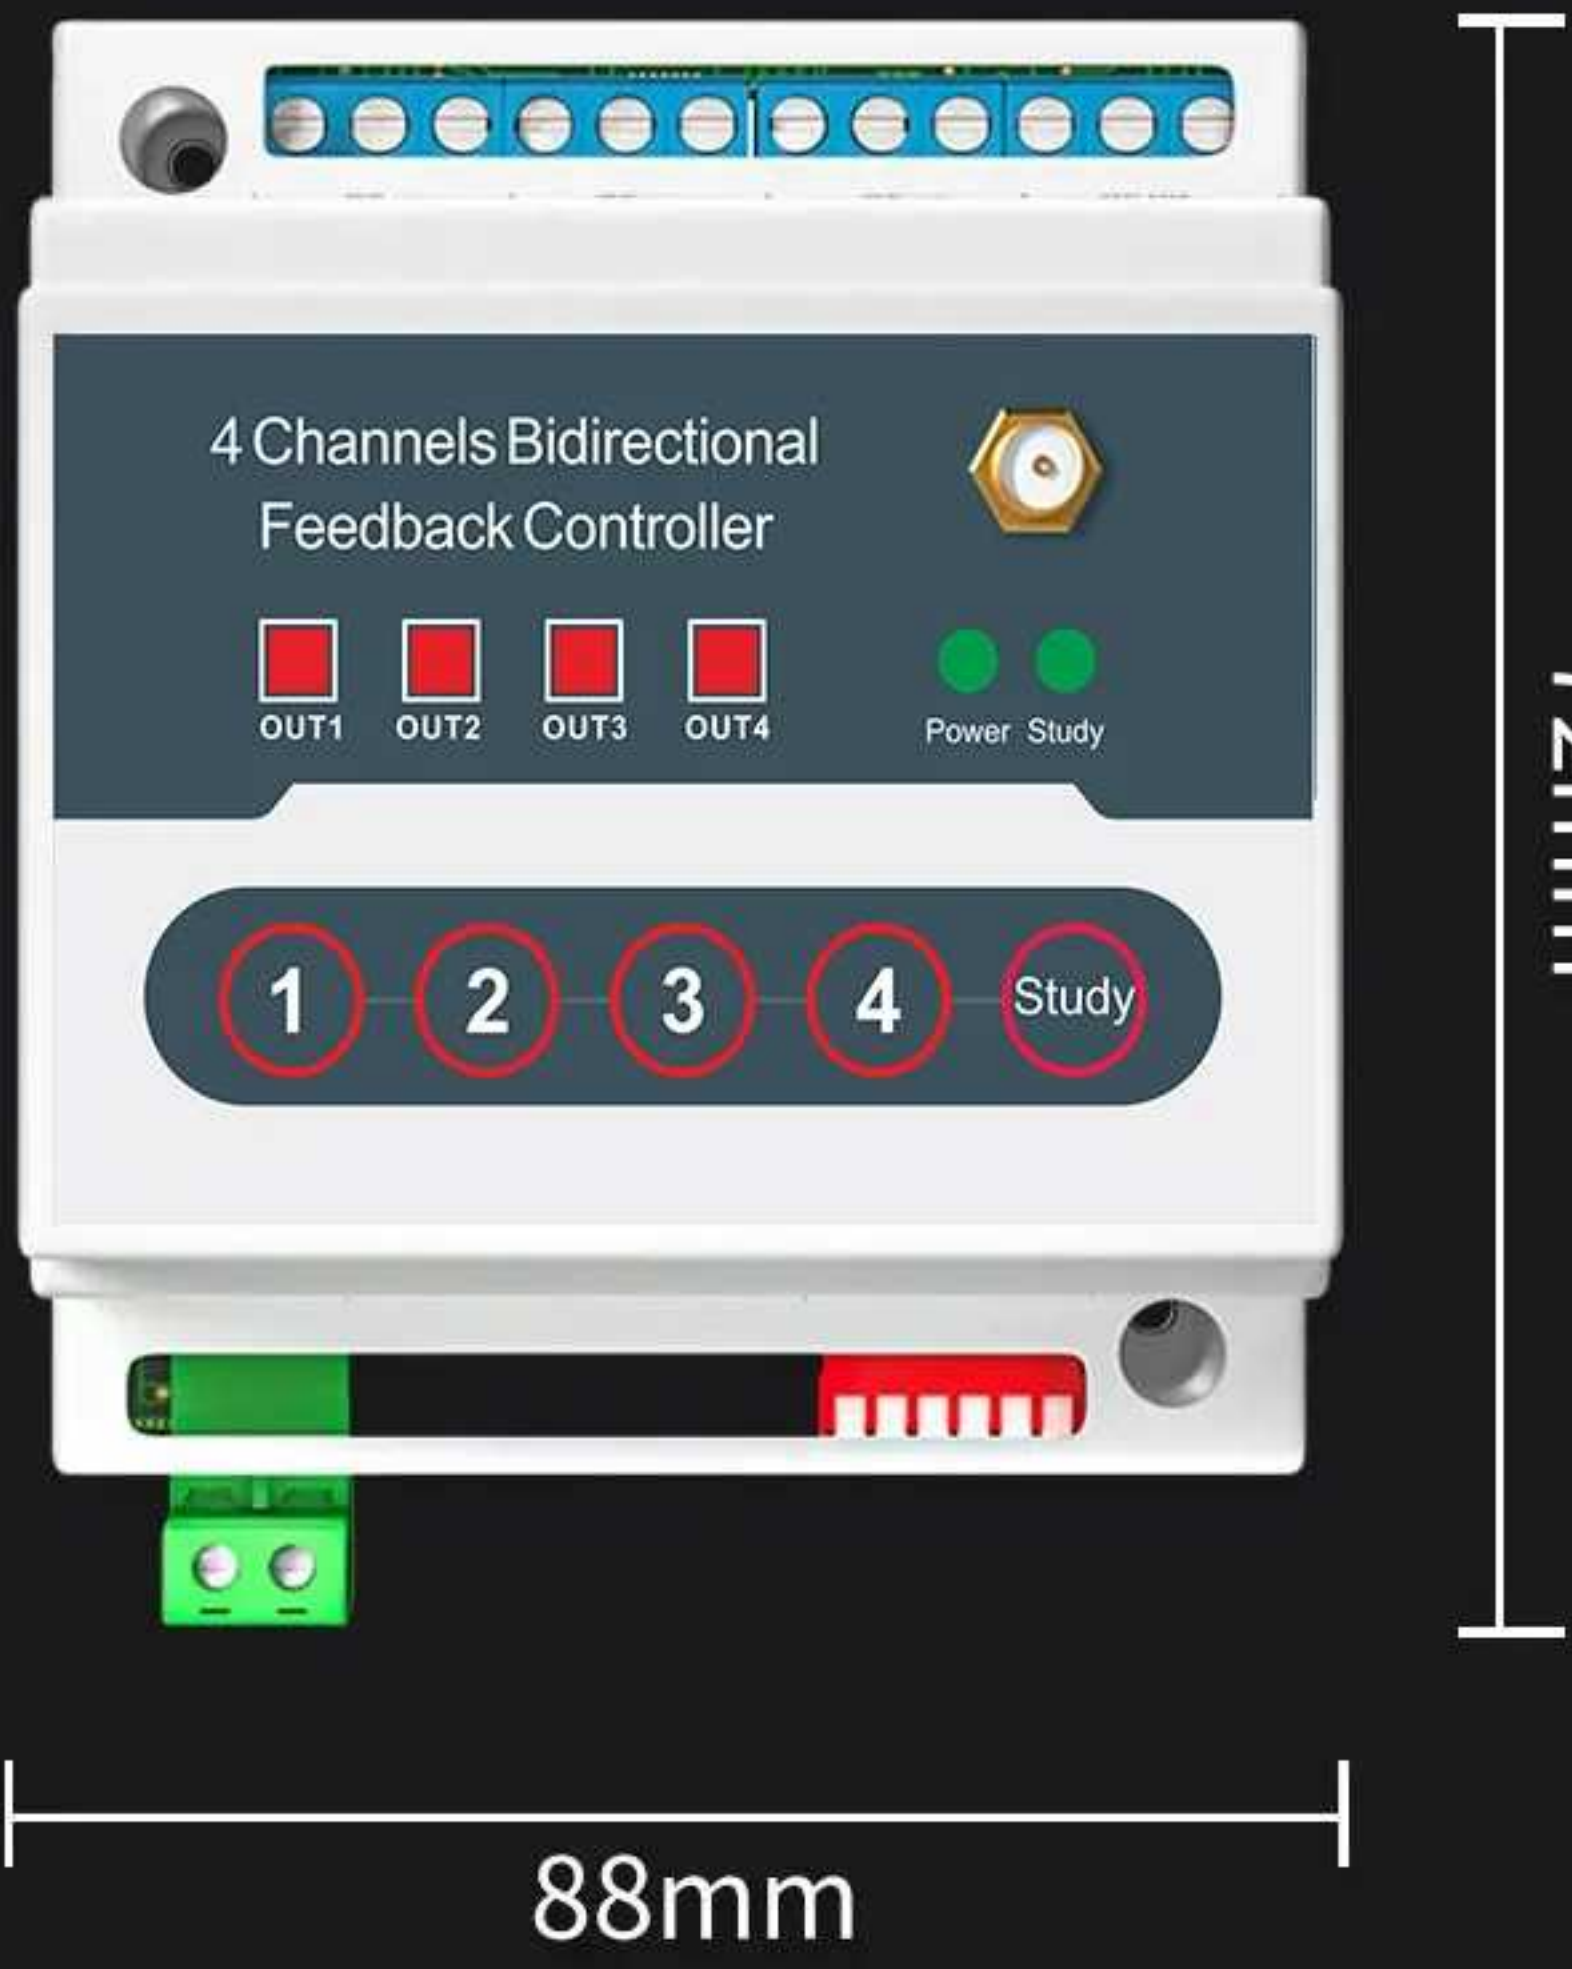

Brand Name **PUFFINS**	Model Number **HK-FK40**

Operating Temperature
-40 to 70 ℃

Max. Current **10A**	Max. Voltage **DC9-30V**

Working mode **Pointing, self-locking**	Host size **72*88*59mm**

Receiving Sensitivity
-146dBm

Frequency
433MHz(868/915MHz available)

Modulation Mode
FSK (FM)+ LORA(SPSP)

PACKAGING DETAILS

Packing detail

Remote control switch has more than one version of the specific details please consult online customer service the following products is the product packaging display, delivery to the customer photographed product version shall prevail!




4 Way Feedback Controller



4 Keys Feedback Remote Controller




External Antenna

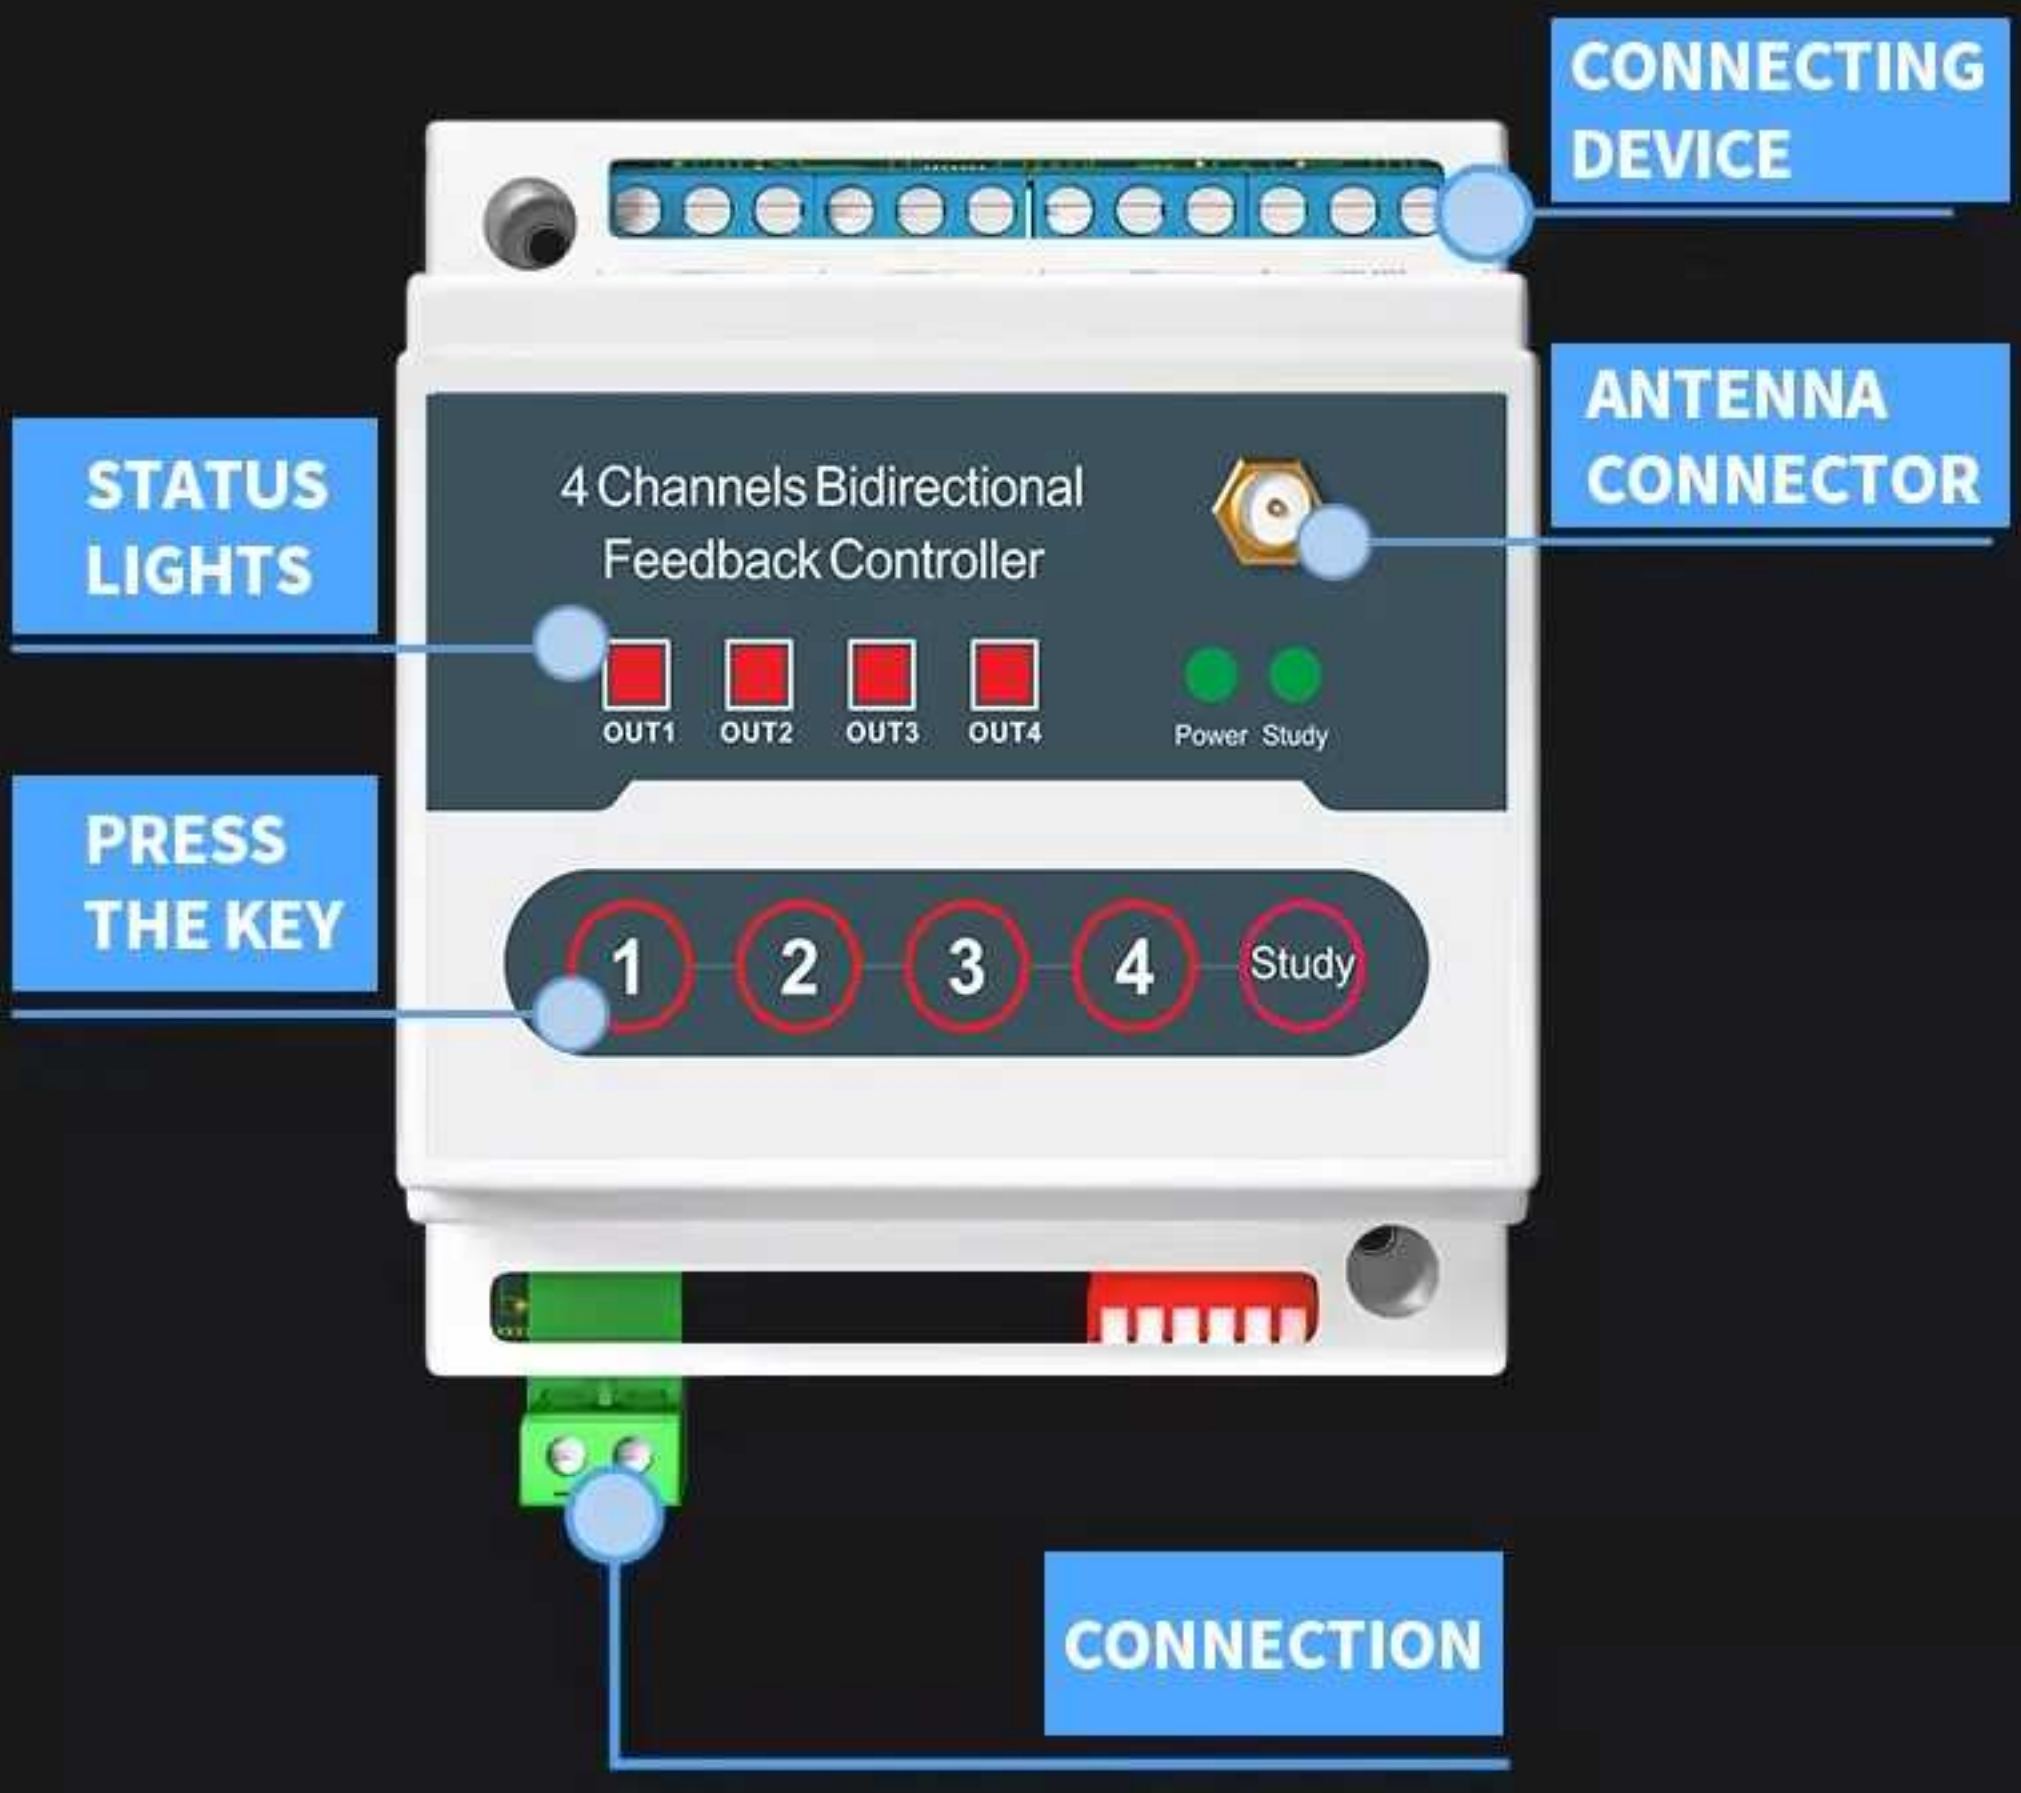

CONNECTING DEVICE
ANTENNA CONNECTOR
STATUS LIGHTS
4 Channels Bidirectional Feedback Controller
OUT1
OUT2
OUT3
OUT4
Power
Study
PRESS THE KEY
1
2
3
4
Study
CONNECTION


INDICATOR LIGHTS
A
B
C
D
PUSHBUTTON
POWER SWITCH
UP:
ON DOWN:OFF
136mm
42mm

WIRING DIAGRAM FOR 220V AND LOW VOLTAGE CONTROL OF EQUIPMENT UNDER 500 WATTS

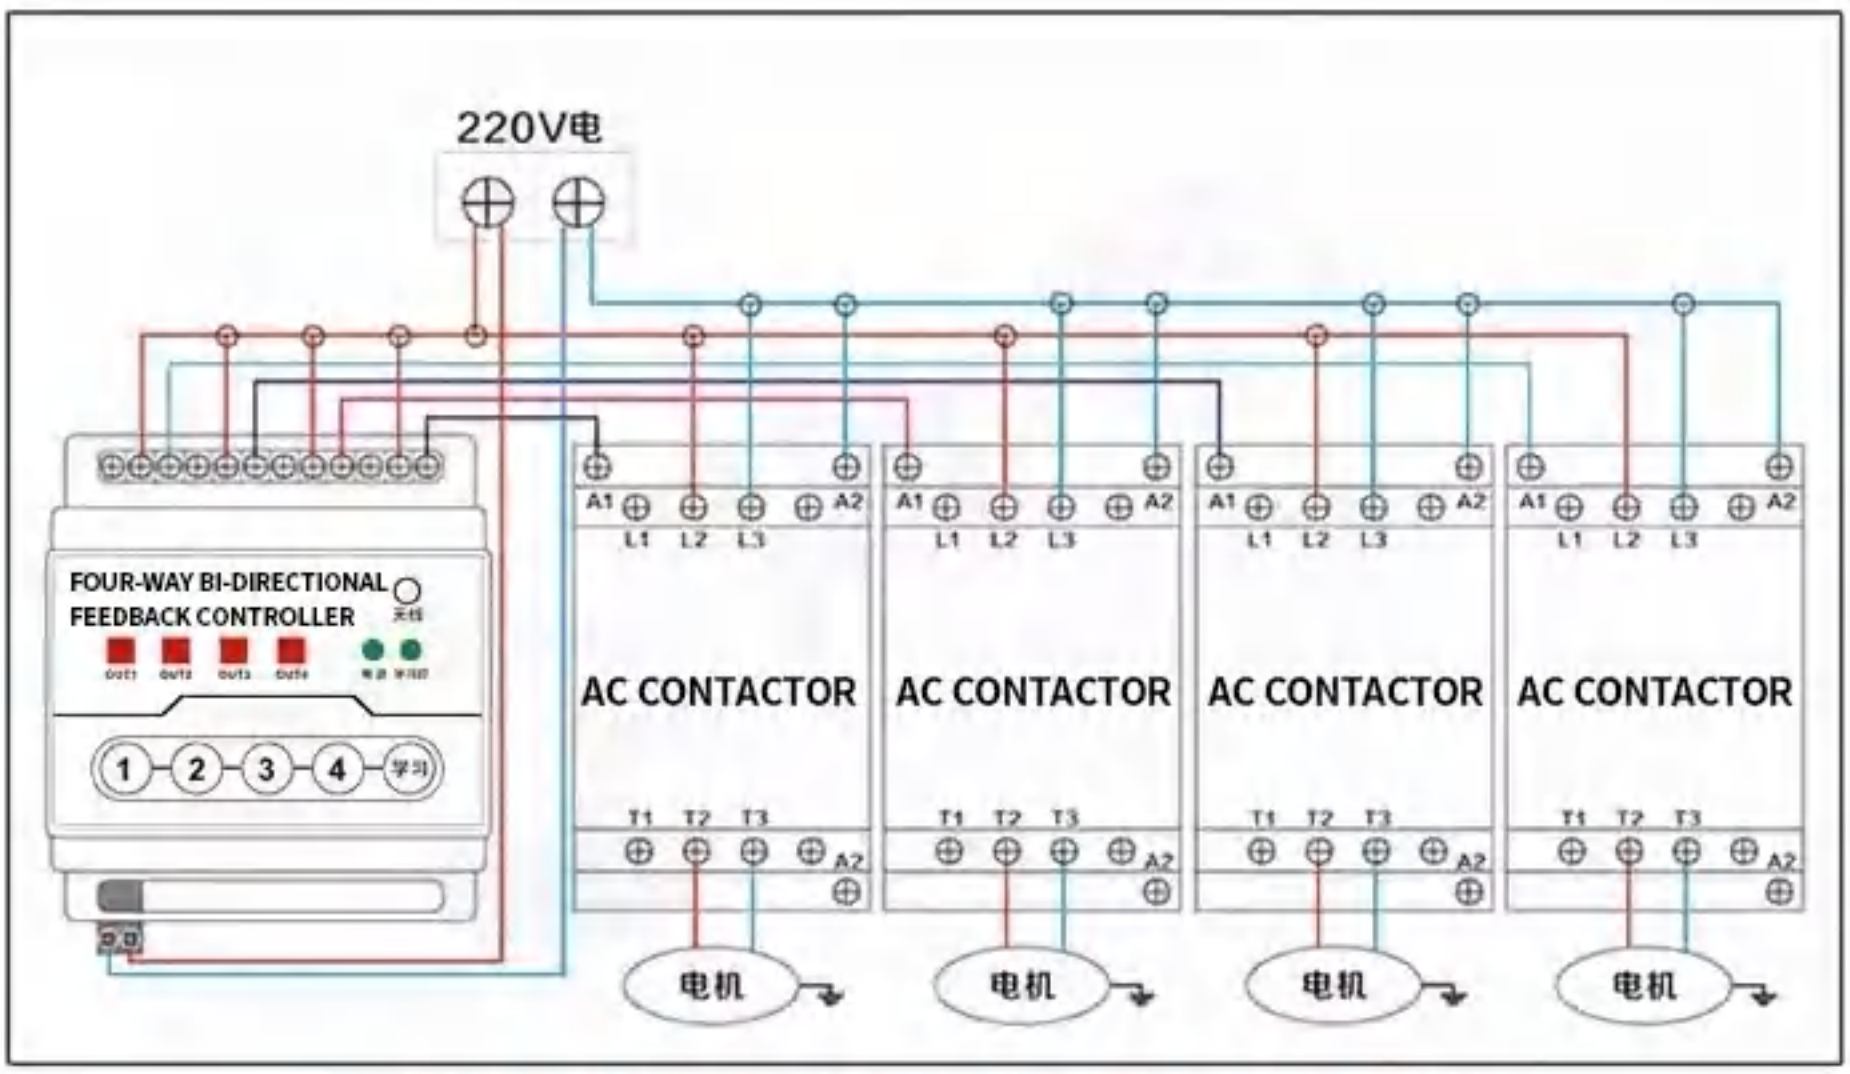


220V CONTROL MORE THAN 500 WATTS EQUIPMENT WIRING DIAGRAM

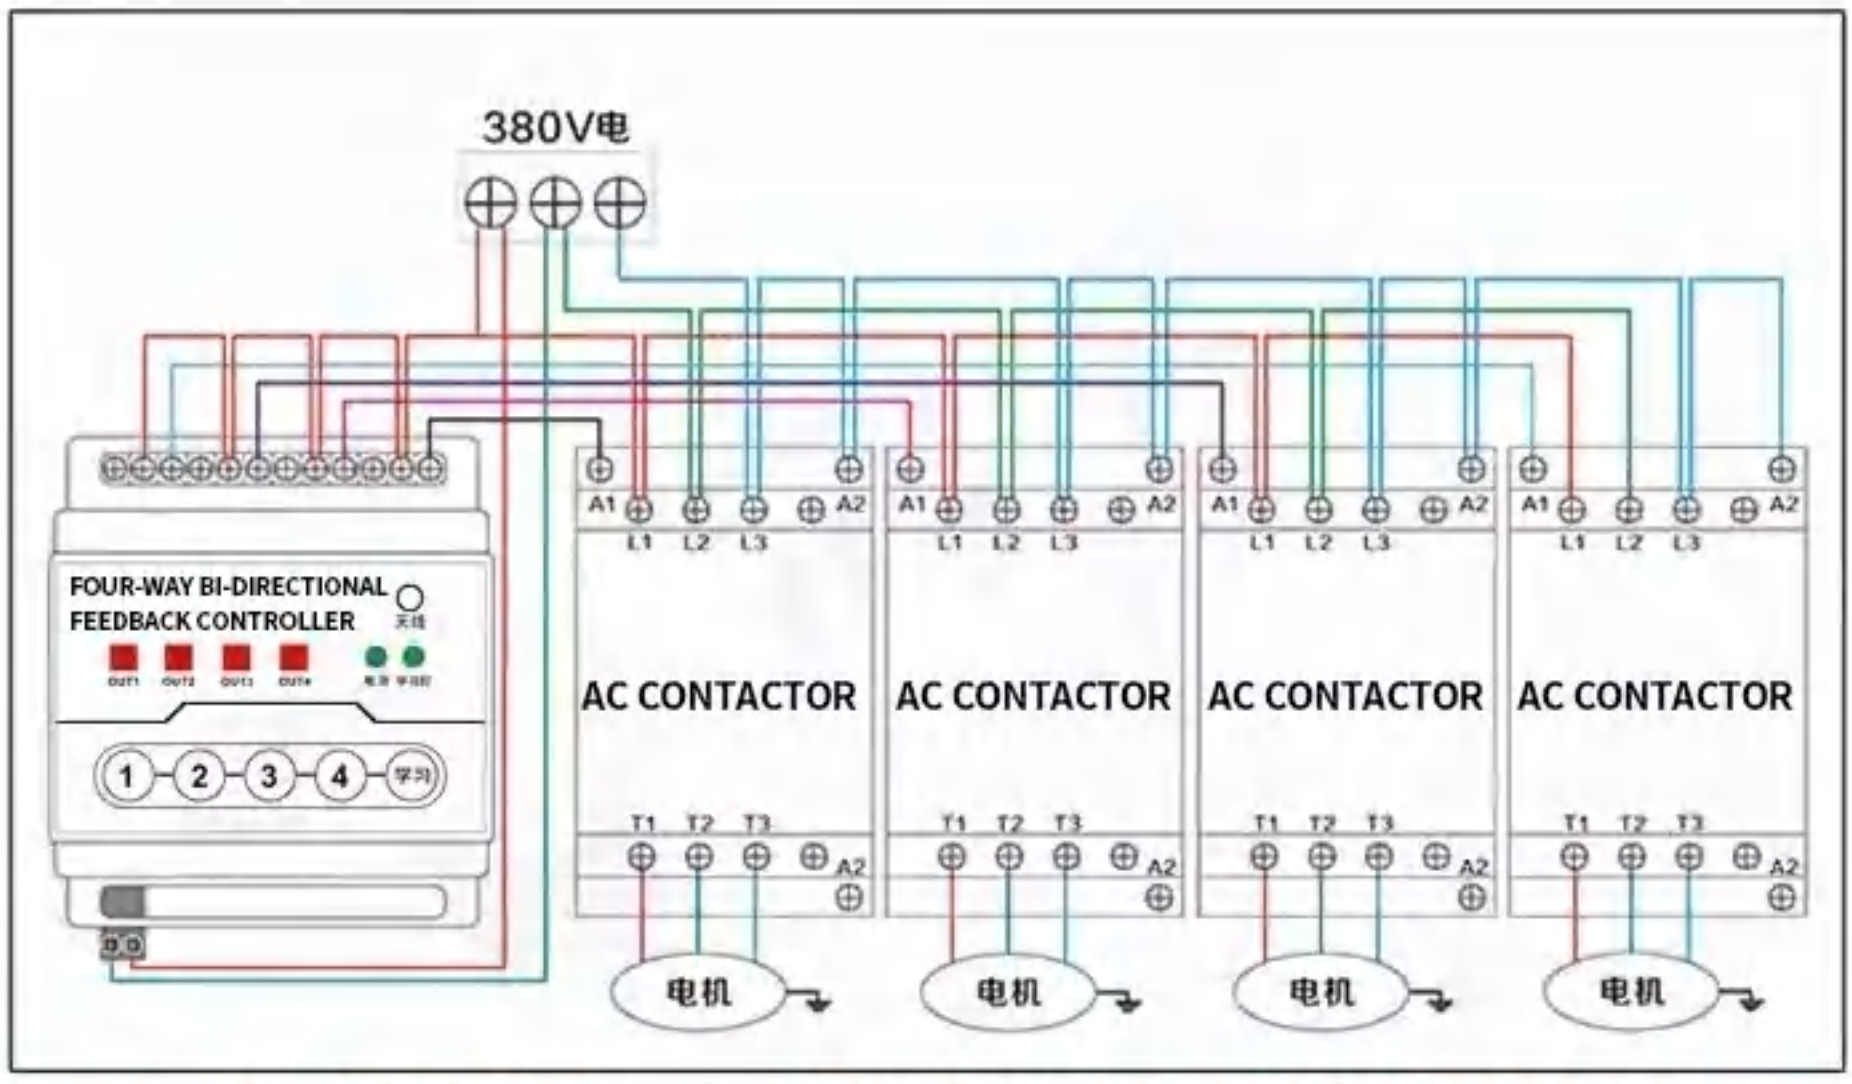

380V CONTROL AC CONTACTOR WIRING DIAGRAM

WIRING DIAGRAM

Wiring diagram

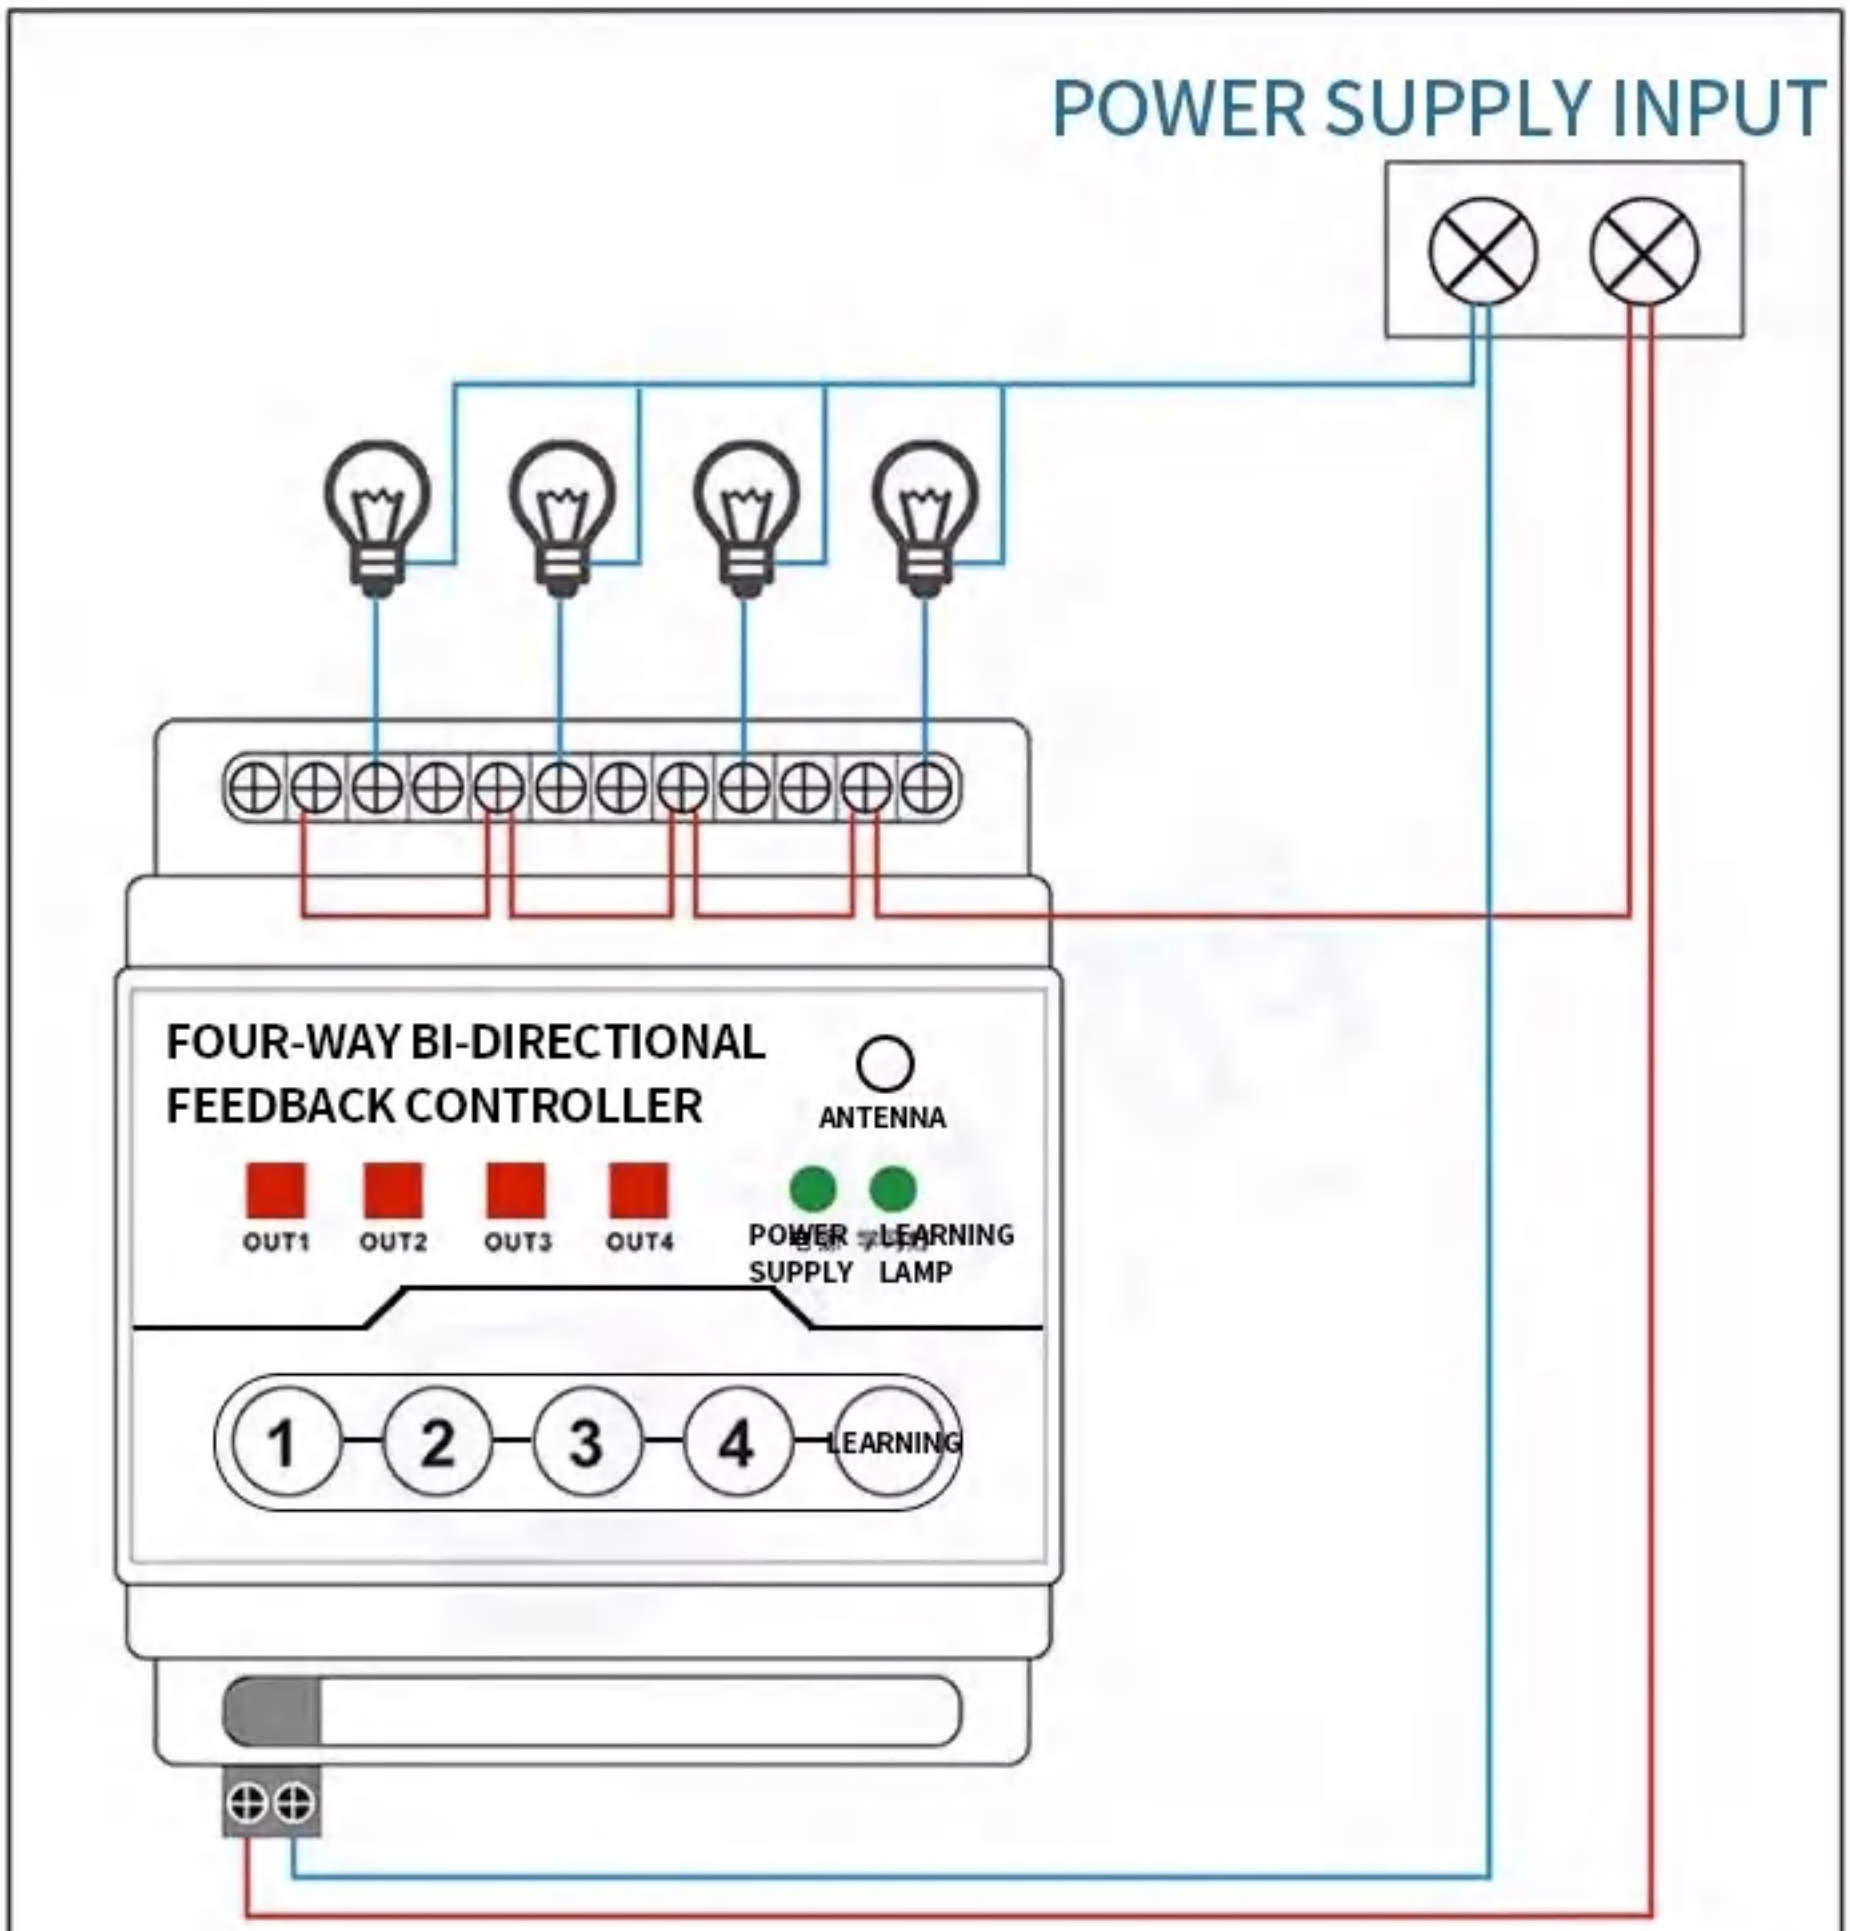

THE BULB IN THE PICTURE CAN BE REPLACED WITH OTHER LOAD DEVICES