
REMOTE CONTROL THROUGH THE WALL

THE SIGNAL IS STABLE, THE REMOTE CONTROL DISTANCE IS LONG, AND IT CAN PENETRATE THE WALL IN 360° DIRECTIONS.



INSTALLATION METHOD

THE PRODUCT ADOPTS THE SCREW INSTALLATION METHOD, WHICH IS FAST AND CONVENIENT

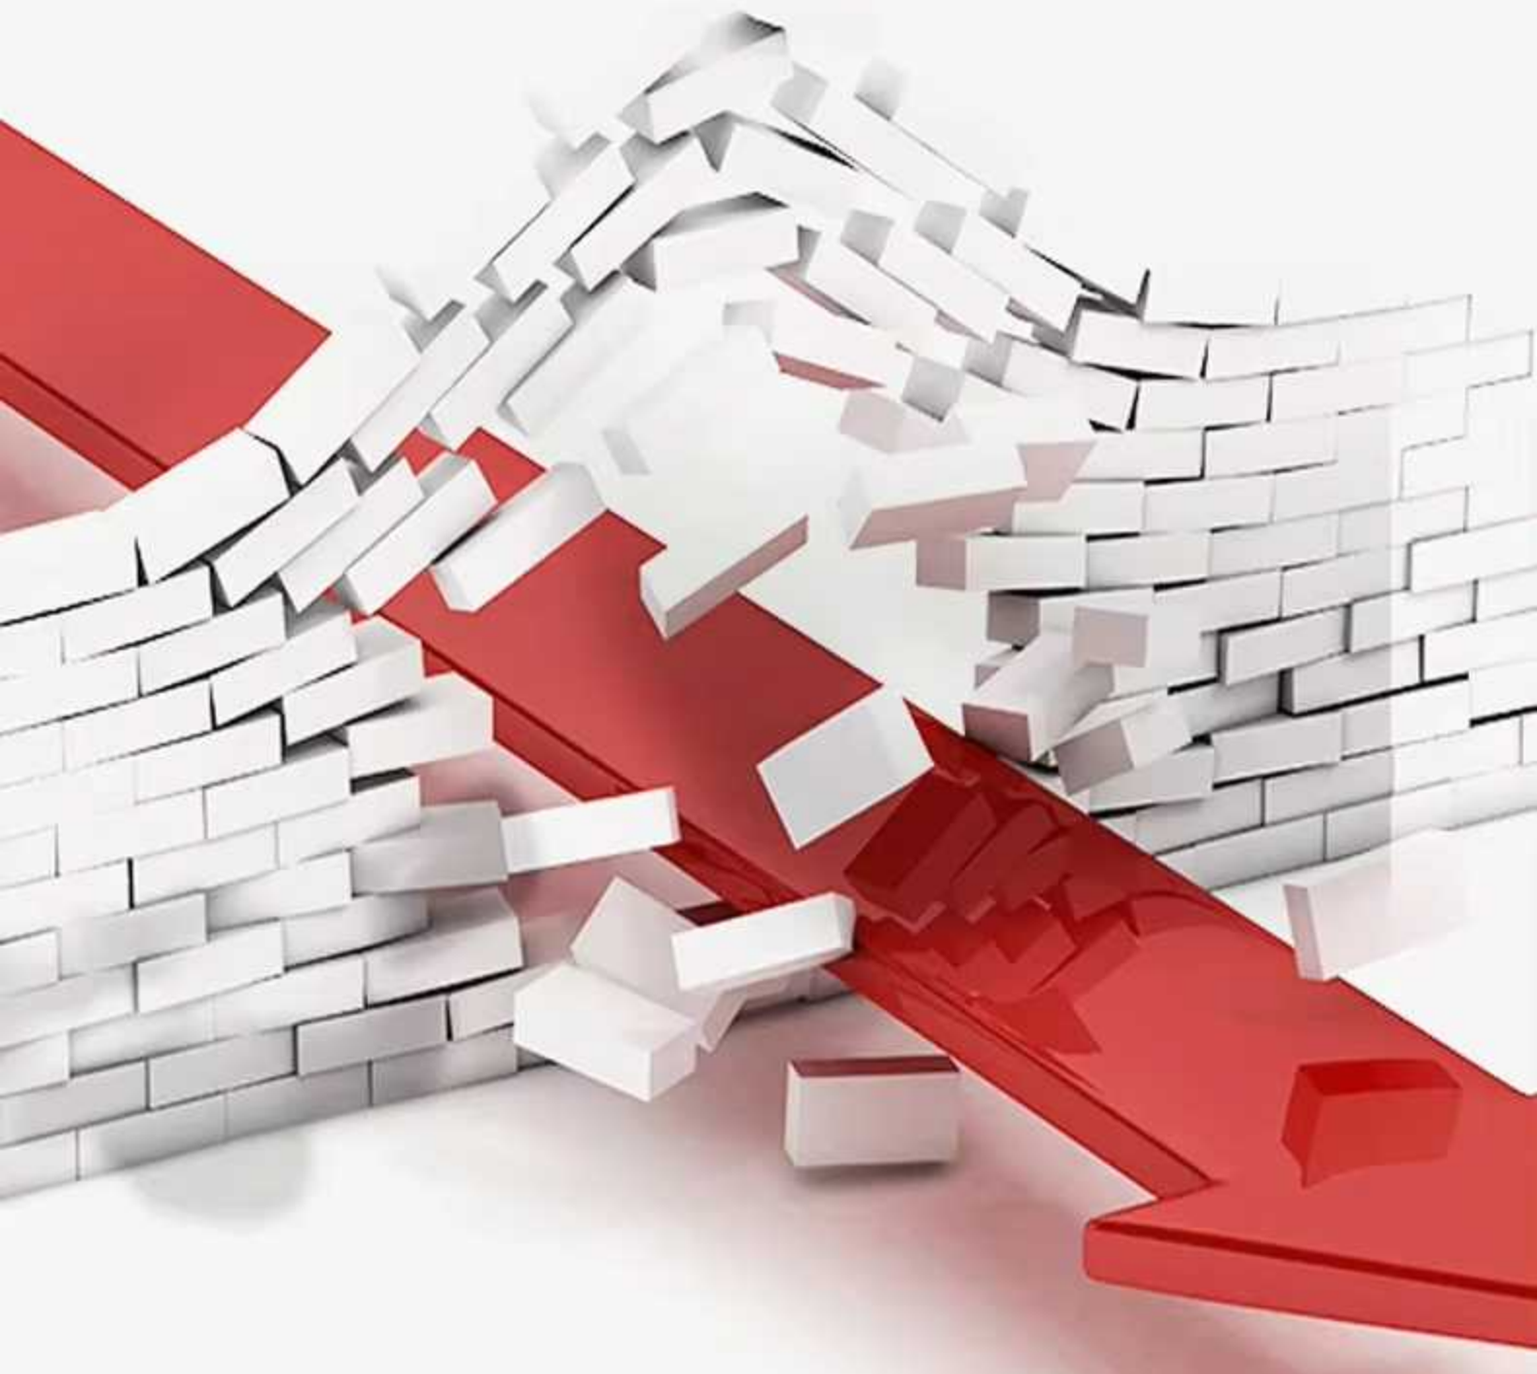

BUILT-IN LIMIT FUNCTION

WHEN THE SPRING LIMIT IS TOUCHED,

THE LIMIT IS TRIGGERED AND THE ROLLER SHUTTER STOPS WORKING




SHELL RAINPROOF DESIGN

WITH WATERPROOF AND FLAME RETARDANT FUNCTION,


THERE IS NO NEED TO WORRY ABOUT UNEXPECTED SITUATIONS SUCH AS RAIN




VARIOUS MODES CAN BE ADJUSTED

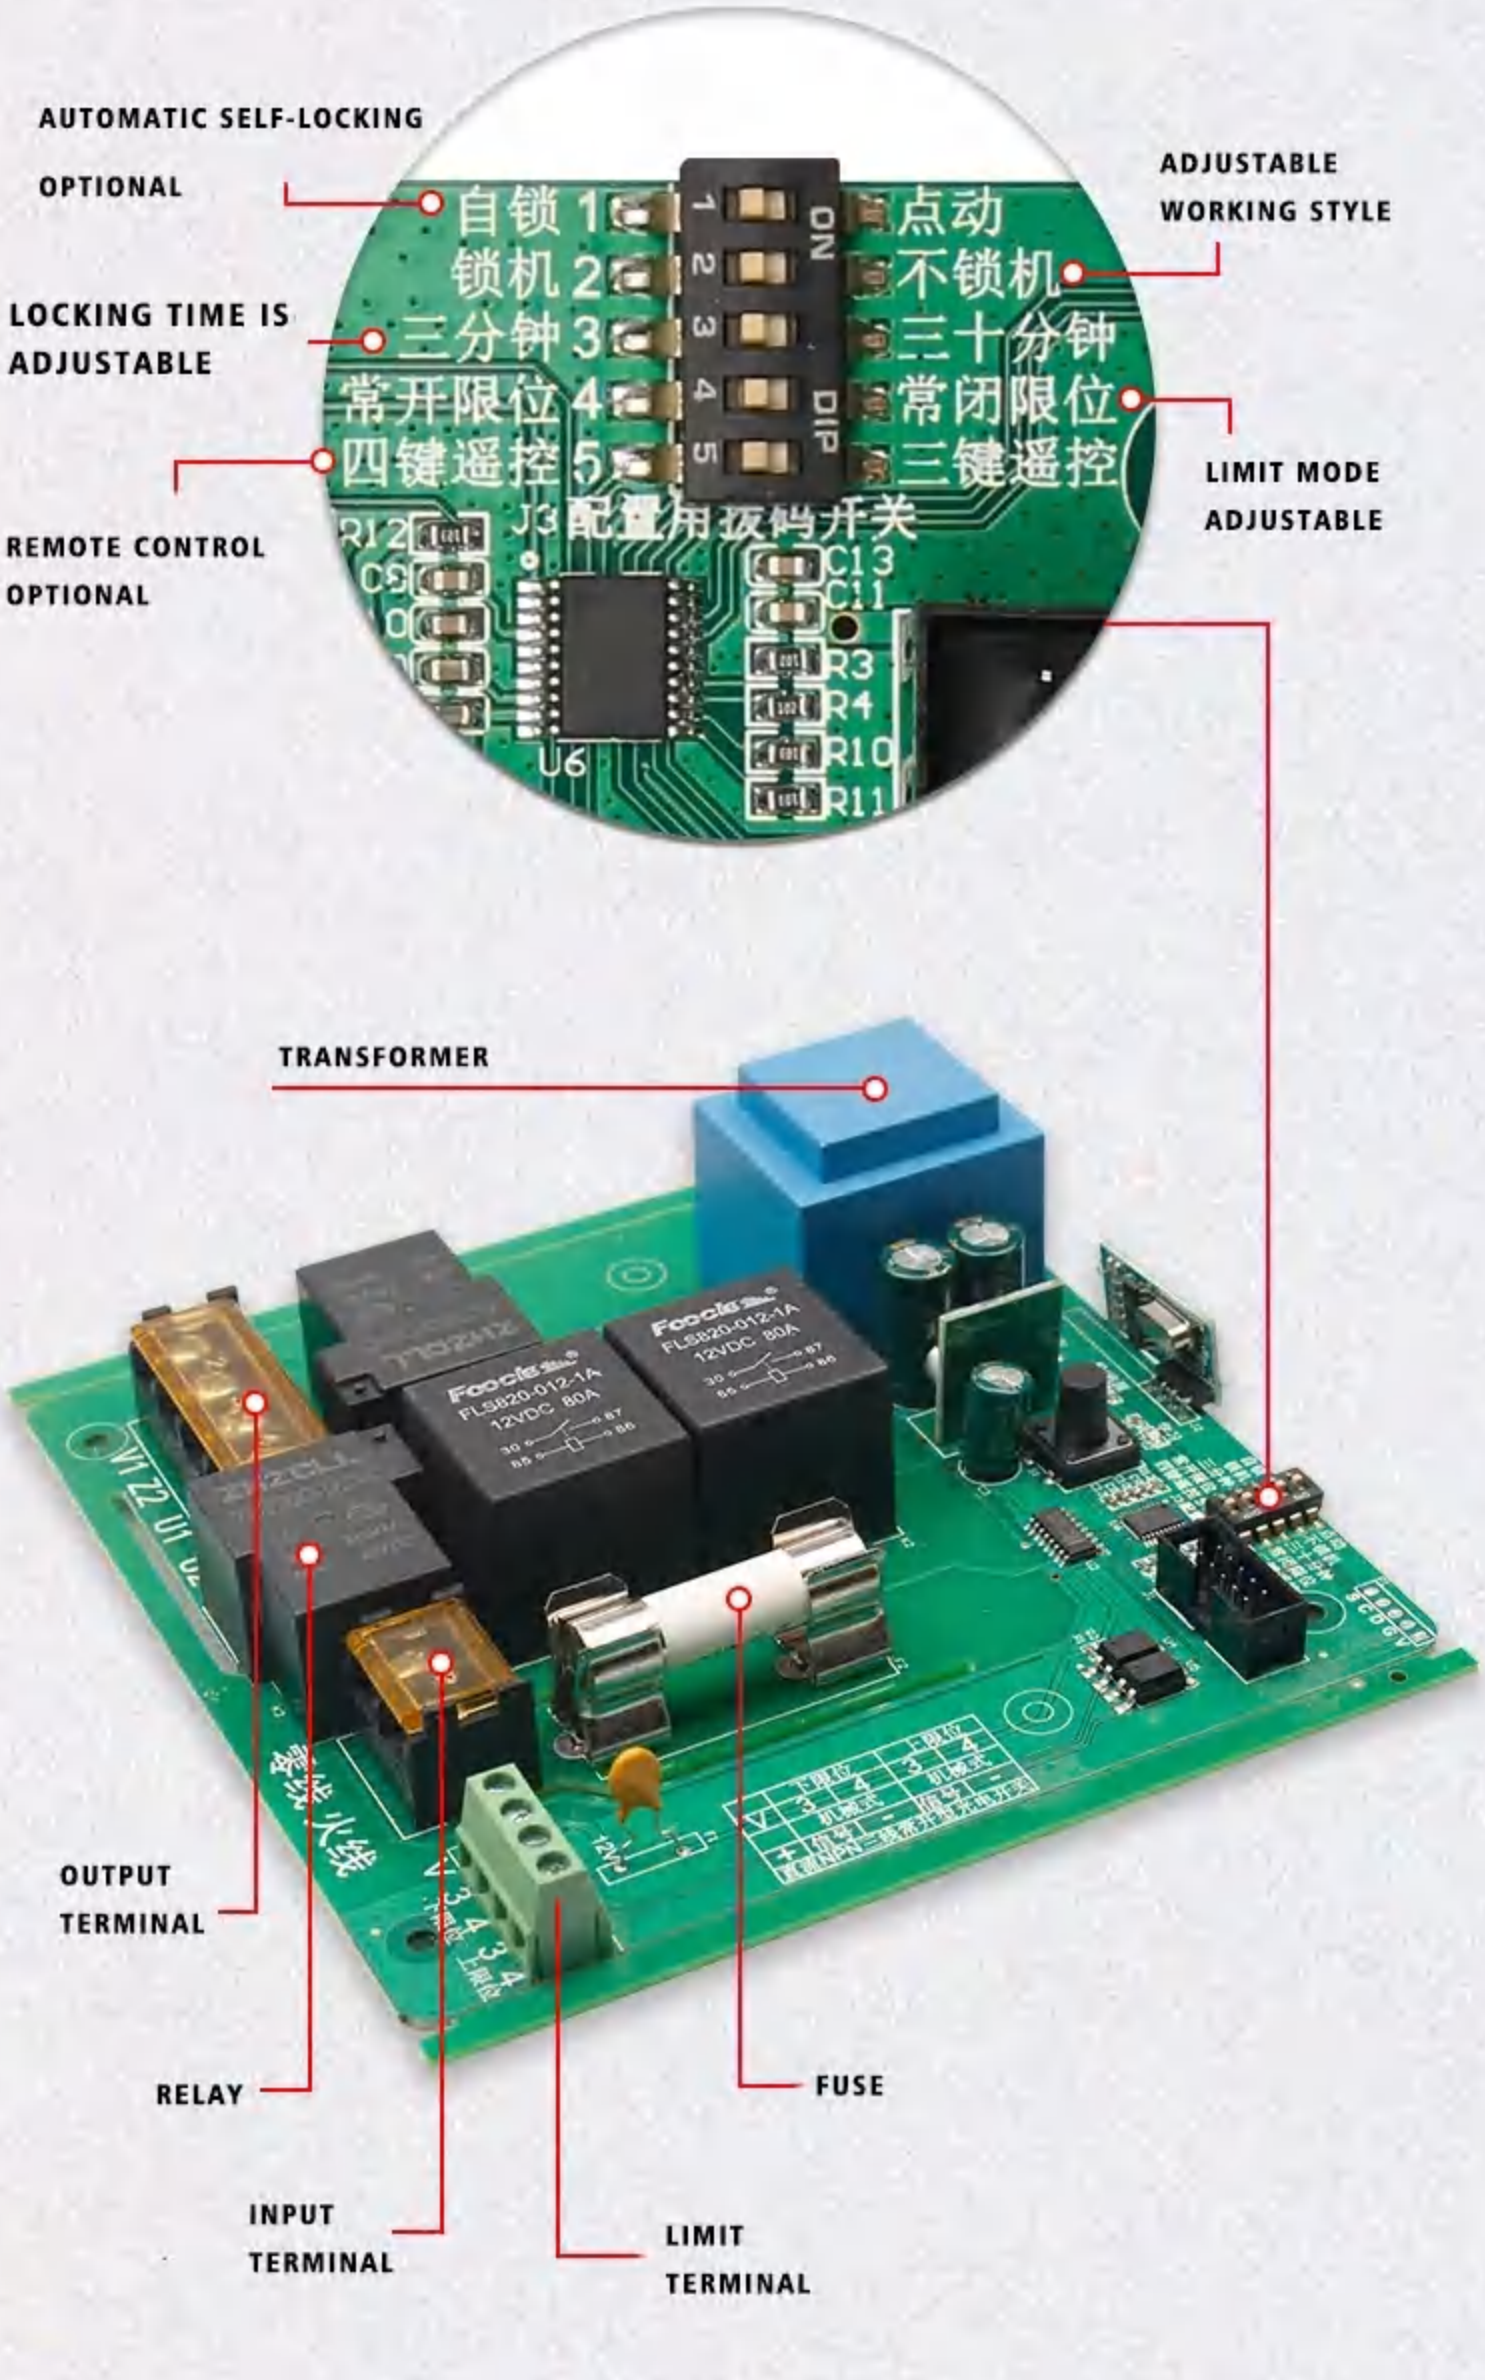

380V MOTOR WIRING DIAGRAM

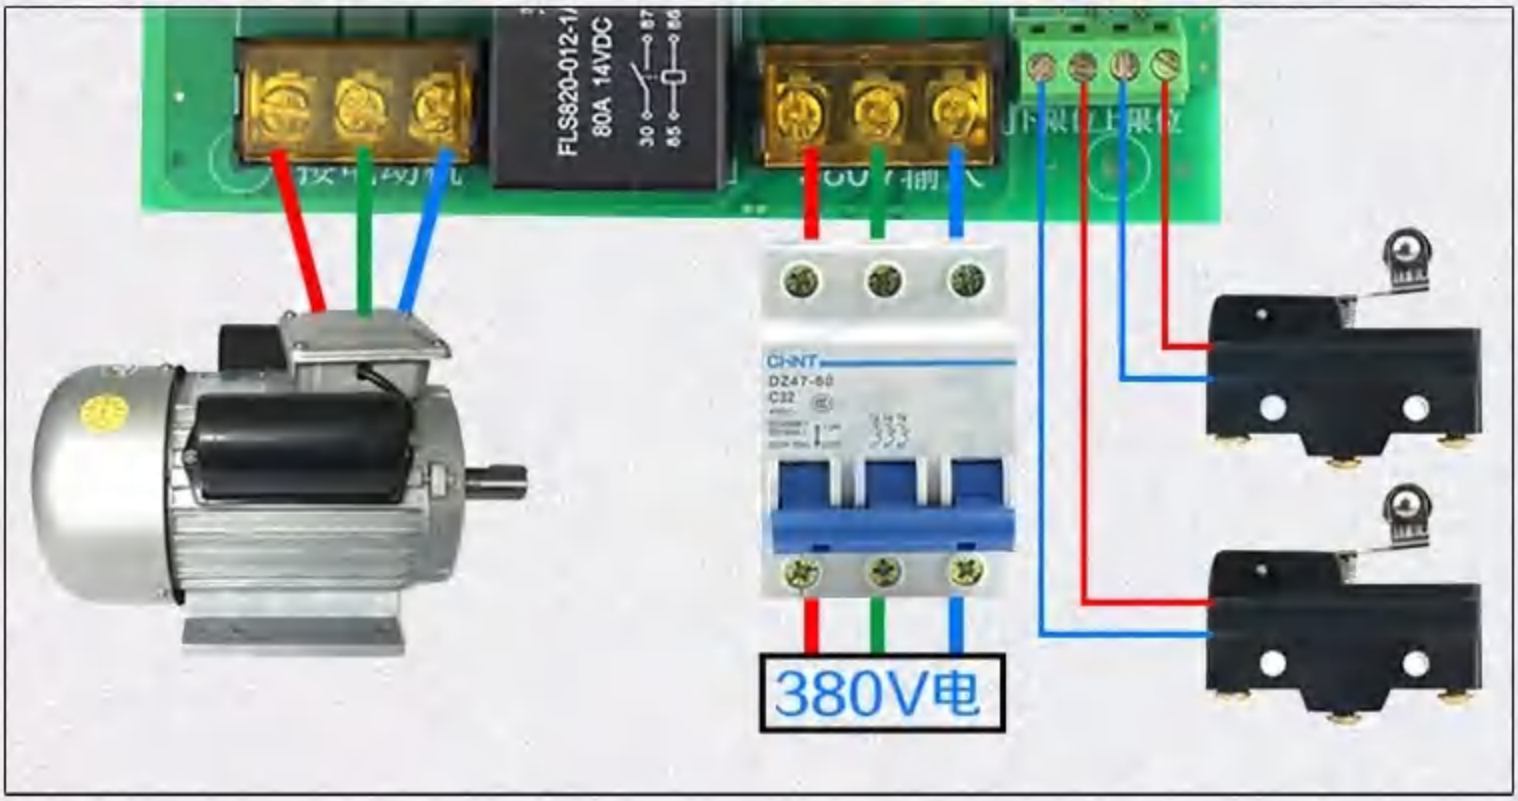

LIMIT SWITCH WIRING DIAGRAM

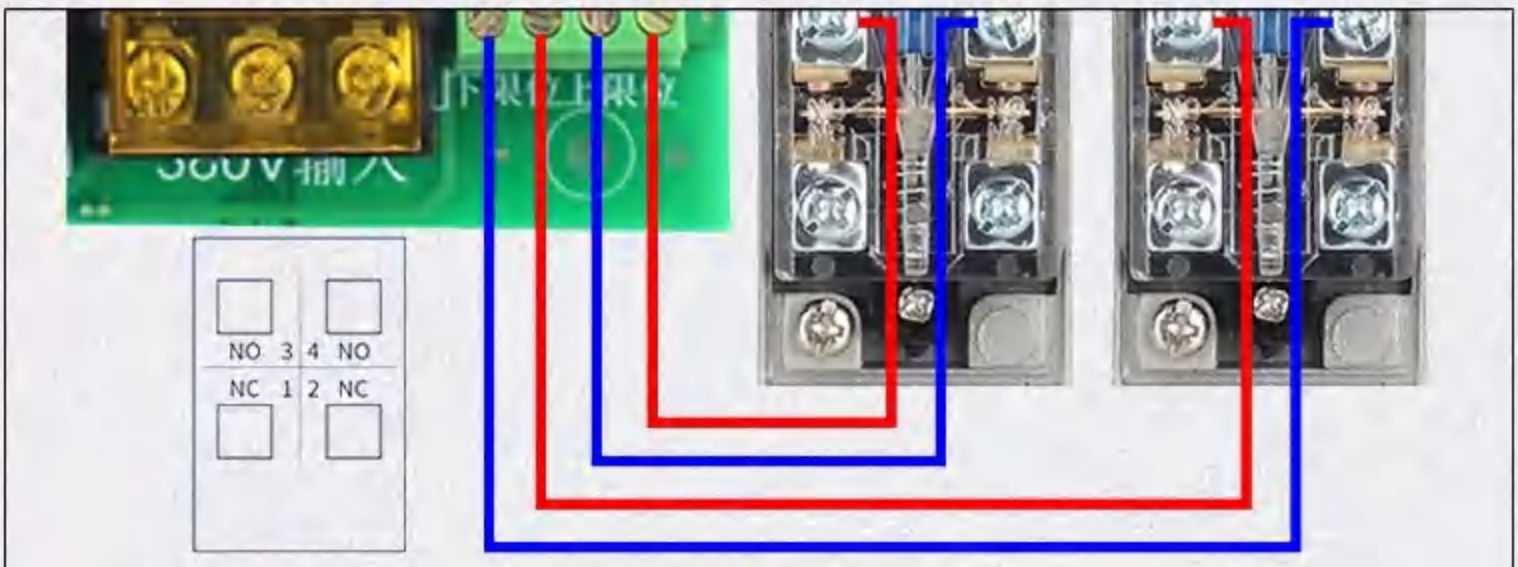

THE LIMIT SWITCH WIRING IS CONNECTED TO THE TOP (NO3 AND NO4)

THE UPPER AND LOWER LIMIT SWITCHES ARE CONNECTED TO NO3 AND NO4

WHY CHOOSE FORWARD AND REVERSE CONTROLLER

YOUR NEEDS - WE ALL UNDERSTAND




REMOTE CONTROL



LIMIT FUNCTION



RAINPROOF AND
FLAME RETARDANT



SMART CHIP



SIMPLE WIRING



MANUAL BUTTON

SIGNAL STABILIZATION REMOTE SWITCH

SUPER LONG-DISTANCE CONTROL MOTOR FORWARD AND REVERSE WORK, CAN PASS THROUGH OBSTACLES



REMOTE CONTROL DISTANCE: 3000M

PUFFINS

FLAME
FIGHTER

1-99 ROAD

GREENHOUSE ROLLER SHUTTER REMOTE CONTROL

- ☑ RAINPROOF BELT, LIMIT FUNCTION
- ☑ FORWARD | REVERSE | REMOTE CONTROL



CHOICE OF LIMITED PACKAGES

PACKAGE A:



UPPER LIMIT MERCURY SWITCH:

THE MERCURY LIMIT FLIPS 90°, TRIGGERING THE LIMIT ROLLER SHUTTER TO STOP WORKING



LOWER LIMIT MERCURY SWITCH:

WHEN THE PEDAL LIMIT IS PRESSED, THE LIMIT ROLLER SHUTTER WILL BE TRIGGERED TO STOP WORKING

PACKAGE B:



UPPER LIMIT SPRING SWITCH:

WHEN THE SPRING LIMIT IS TOUCHED, THE TRIGGER LIMIT ROLLER SHUTTER STOPS WORKING



LOWER LIMIT SPRING SWITCH:

WHEN THE SPRING LIMIT IS TOUCHED, THE TRIGGER LIMIT ROLLER SHUTTER STOPS WORKING

PRODUCT PARAMETERS AND DIMENSIONS

Brand: PUFFINS/ Puffin	**Brand: PUFFINS/ Puffin**
Product name: Motor forward and reverse controller	**Product name: Motor forward and reverse remote control**
Product Model: HK-ZF22OR/HK-ZF320R	**Remote control distance: 3000 meters**
Working voltage: 220/380V	**Operating frequency: 433MHz**
Operating frequency: 433MHz	**Remote control battery: 9v**
Working mode: self-locking, jog (default self-locking)	**Ambient temperature: -40°C~70°c**
Host size: 161*211*70mm	**Product size: 136*42*24mm**



Self-locking version: press the transmitter button, the receiver works, press it again to stop


Jog version: Press the transmitter button, the receiver works, release it to stop

LEARNING METHOD → PRESS THE LEARNING BUTTON, THE LEARNING LIGHT IS ON → PRESS THE STOP BUTTON ON THE REMOTE CONTROL AT THIS TIME→THE STUDY LIGHT IS OFF, THE STUDY IS COMPLETED

CODE CLEARING METHOD → LONG PRESS THE LEARNING BUTTON, DO NOT RELEASE → UNTIL THE LEARNING LIGHT GOES OUT → CLEAR CODE IS COMPLETED

PRODUCT WIRING DIAGRAM

220V DUAL VALUE CAPACITOR MOTOR WIRING DIAGRAM

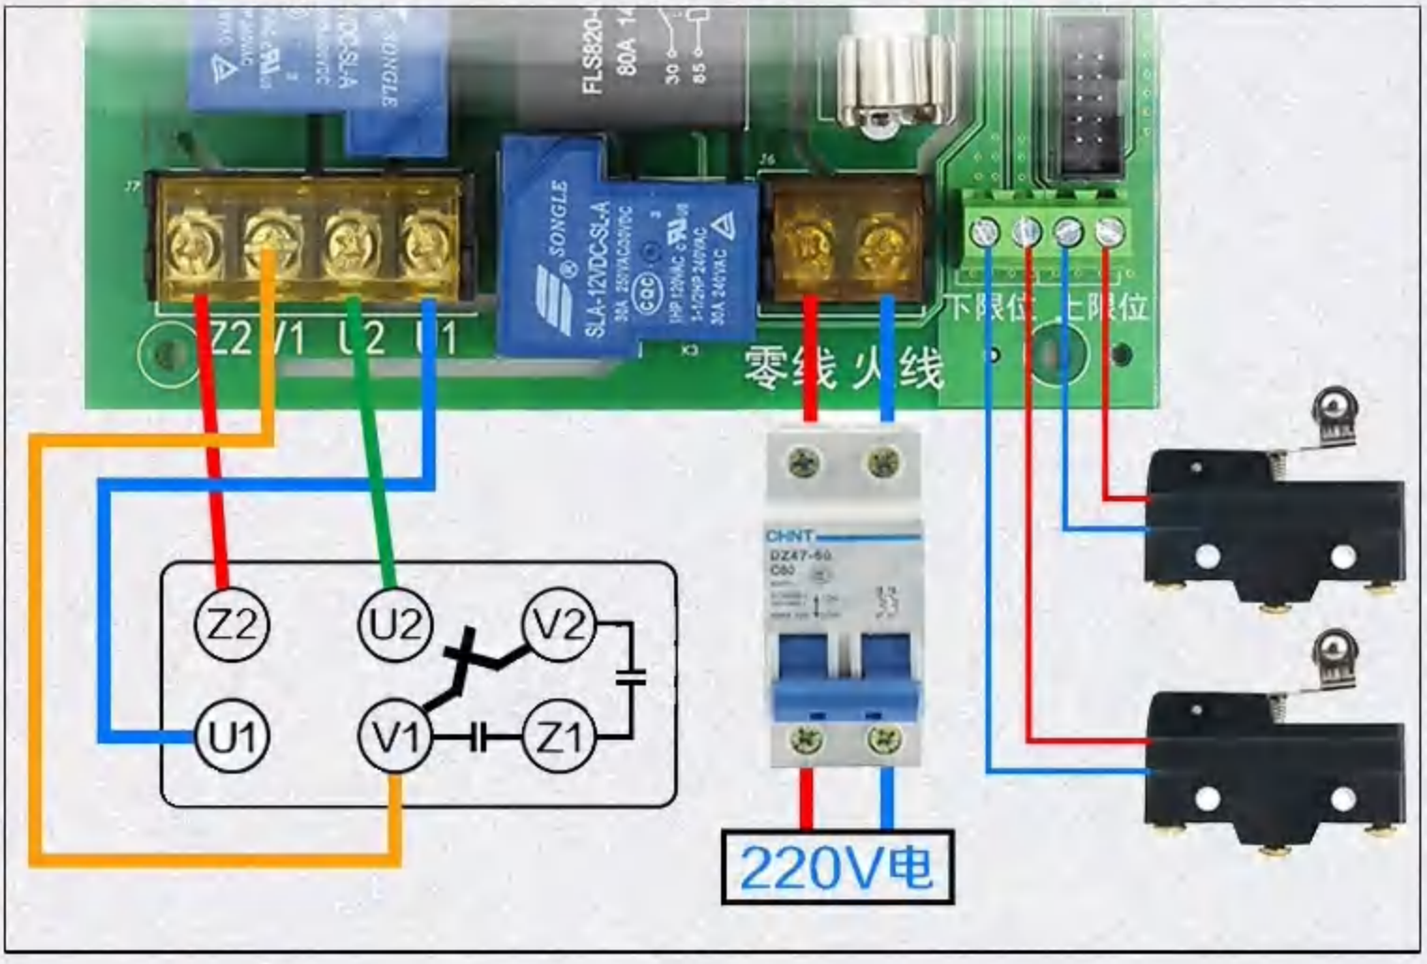

GREENHOUSE ROLLER SHUTTER CONTROLLER

PRODUCT SHIPPING LIST



- HOST*1



- WATERPROOF CONNECTOR*3





- WATERPROOF STRIP*1

IF YOU HAVE ANY QUESTIONS, PLEASE CONTACT CUSTOMER SERVICE

SPECIAL REMINDER

THE PRODUCT HAS BEEN MATCHED! THERE IS NO NEED TO RE-MATCH THE CODE! THIS PRODUCT DOES NOT HAVE A LIMIT SWITCH, IF YOU NEED IT, PLEASE BUY IT YOURSELF

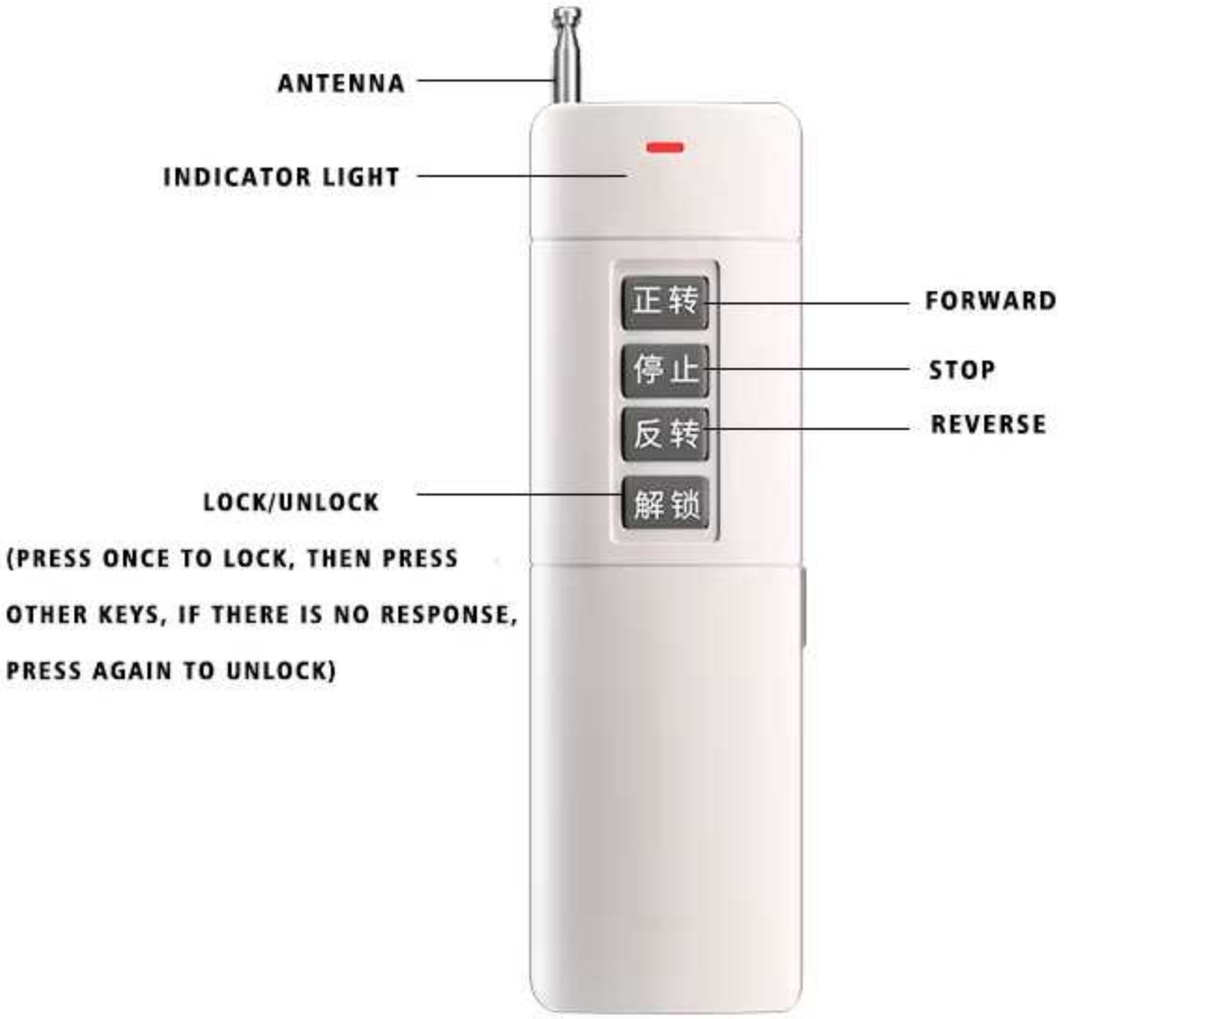
ANTENNA
INDICATOR LIGHT
正转
停止
反转
解锁
FORWARD
STOP
REVERSE
LOCK/UNLOCK
(PRESS ONCE TO LOCK, THEN PRESS
OTHER KEYS, IF THERE IS NO RESPONSE,
PRESS AGAIN TO UNLOCK)

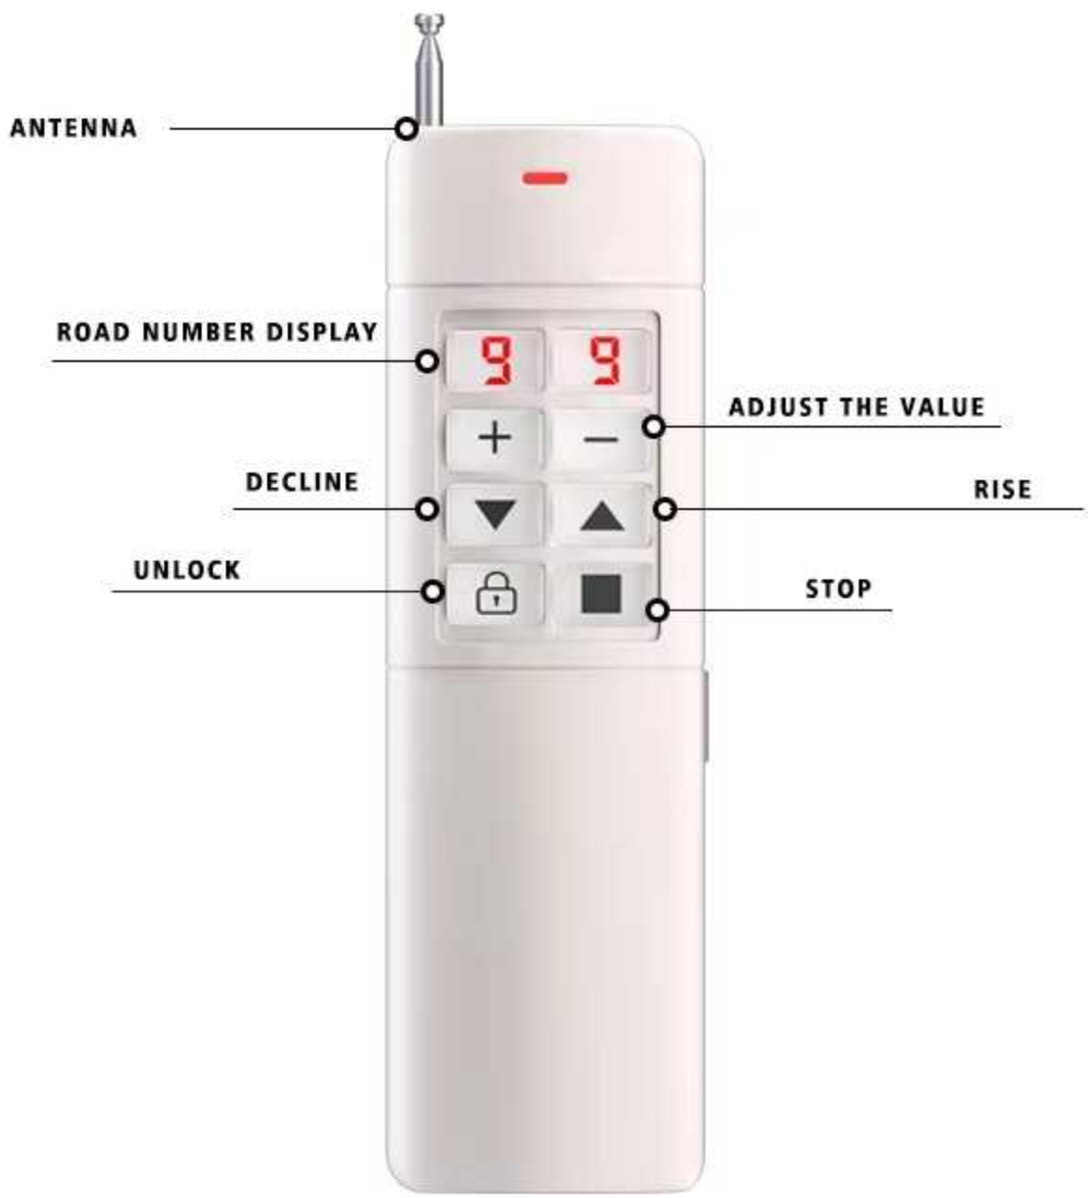
ANTENNA
ROAD NUMBER DISPLAY
ADJUST THE VALUE
DECLINE
RISE
UNLOCK
STOP

APPLIED TO VARIOUS EQUIPMENT

CAN BE USED FROM AGRICULTURAL PLANTING TO PRODUCTION EQUIPMENT



GREENHOUSE ROLLER BLIND



ROLLER SHUTTER CONTROL



HOIST EQUIPMENT



LIFTING EQUIPMENT